

明裝面板燈系列

Mounted Panel Light Series



型號model: ZYWW-MBD001
光源light source: LED
輸入電流input current: 300mA
功率power: 6W
可調色溫adjustable color temperature: 2700K-6500K
光通量flux: 480LM
光束角beam angle: 120°
外觀尺寸exterior size: \varnothing 120 x 40mm



型號model: ZYWW-MBD005
光源light source: LED
輸入電流input current: 300mA
功率power: 6W
可調色溫adjustable color temperature: 2700K-6500K
光通量flux: 480LM
光束角beam angle: 120°
外觀尺寸exterior size: 100 x 100 x 30mm



型號model: ZYWW-MBD002
光源light source: LED
輸入電流input current: 300mA
功率power: 12W
可調色溫adjustable color temperature: 2700K-6500K
光通量flux: 960LM
光束角beam angle: 120°
外觀尺寸exterior size: \varnothing 175 x 36mm



型號model: ZYWW-MBD006
光源light source: LED
輸入電流input current: 300mA
功率power: 12W
可調色溫adjustable color temperature: 2700K-6500K
光通量flux: 960LM
光束角beam angle: 120°
外觀尺寸exterior size: 170 x 170 x 40mm



型號model: ZYWW-MBD003
光源light source: LED
輸入電流input current: 300mA
功率power: 18W
可調色溫adjustable color temperature: 2700K-6500K
光通量flux: 1440LM
光束角beam angle: 120°
外觀尺寸exterior size: \varnothing 225 x 40mm



型號model: ZYWW-MBD007
光源light source: LED
輸入電流input current: 300mA
功率power: 18W
可調色溫adjustable color temperature: 2700K-6500K
光通量flux: 1440LM
光束角beam angle: 120°
外觀尺寸exterior size: 225 x 225 x 40mm



型號model: ZYWW-MBD004
光源light source: LED
輸入電流input current: 300mA
功率power: 24W
可調色溫adjustable color temperature: 2700K-6500K
光通量flux: 1920LM
光束角beam angle: 120°
外觀尺寸exterior size: \varnothing 300 x 40mm



型號model: ZYWW-MBD008
光源light source: LED
輸入電流input current: 300mA
功率power: 24W
可調色溫adjustable color temperature: 2700K-6500K
光通量flux: 1920LM
光束角beam angle: 120°
外觀尺寸exterior size: 300 x 300 x 40mm

暗裝面板燈系列

Concealed Panel Light Series



型號model: ZYWW-MBD009
光源light source: LED
輸入電流input current: 300mA
功率power: 3W
可調色溫adjustable color temperature: 2700K/3000K/4000K/6500K
光通量flux: 240LM
光束角beam angle: 120°
外觀尺寸exterior size: Ø93 x 22mm



型號model: ZYWW-MBD012
光源light source: LED
輸入電流input current: 300mA
功率power: 12W
可調色溫adjustable color temperature: 2700K/3000K/4000K/6500K
光通量flux: 960LM
光束角beam angle: 120°
外觀尺寸exterior size: Ø169 x 19mm



型號model: ZYWW-MBD010
光源light source: LED
輸入電流input current: 300mA
功率power: 6W
可調色溫adjustable color temperature: 2700K/3000K/4000K/6500K
光通量flux: 480LM
光束角beam angle: 120°
外觀尺寸exterior size: Ø120 x 19mm



型號model: ZYWW-MBD013
光源light source: LED
輸入電流input current: 300mA
功率power: 15W
可調色溫adjustable color temperature: 2700K/3000K/4000K/6500K
光通量flux: 1200LM
光束角beam angle: 120°
外觀尺寸exterior size: Ø192 x 20mm



型號model: ZYWW-MBD011
光源light source: LED
輸入電流input current: 300mA
功率power: 9W
可調色溫adjustable color temperature: 2700K/3000K/4000K/6500K
光通量flux: 720LM
光束角beam angle: 120°
外觀尺寸exterior size: Ø120 x 19mm



型號model: ZYWW-MBD014
光源light source: LED
輸入電流input current: 300mA
功率power: 18W
可調色溫adjustable color temperature: 2700K/3000K/4000K/6500K
光通量flux: 1440LM
光束角beam angle: 120°
外觀尺寸exterior size: Ø223 x 19mm

暗裝面板燈系列 Concealed Panel Light Series



型號model: ZYWW-MBD015
光源light source: LED
輸入電流input current: 300mA
功率power: 3W
可調色溫adjustable color temperature: 2700K/3000K/4000K/6500K
光通量flux: 240LM
光束角beam angle: 120°
外觀尺寸exterior size: 90 × 90 × 20mm



型號model: ZYWW-MBD018
光源light source: LED
輸入電流input current: 300mA
功率power: 12W
可調色溫adjustable color temperature: 2700K/3000K/4000K/6500K
光通量flux: 960LM
光束角beam angle: 120°
外觀尺寸exterior size: 172 × 172 × 19mm



型號model: ZYWW-MBD016
光源light source: LED
輸入電流input current: 300mA
功率power: 6W
可調色溫adjustable color temperature: 2700K/3000K/4000K/6500K
光通量flux: 480LM
光束角beam angle: 120°
外觀尺寸exterior size: 120 × 120 × 19mm



型號model: ZYWW-MBD019
光源light source: LED
輸入電流input current: 300mA
功率power: 15W
可調色溫adjustable color temperature: 2700K/3000K/4000K/6500K
光通量flux: 1200LM
光束角beam angle: 120°
外觀尺寸exterior size: 201 × 201 × 22mm




型號model: ZYWW-MBD017
光源light source: LED
輸入電流input current: 300mA
功率power: 9W
可調色溫adjustable color temperature: 2700K/3000K/4000K/6500K
光通量flux: 720LM
光束角beam angle: 120°
外觀尺寸exterior size: 150 × 150 × 20mm



型號model: ZYWW-MBD020
光源light source: LED
輸入電流input current: 300mA
功率power: 18W
可調色溫adjustable color temperature: 2700K/3000K/4000K/6500K
光通量flux: 1440LM
光束角beam angle: 120°
外觀尺寸exterior size: 225 × 225 × 19mm

軟燈條系列

Strip Light Series

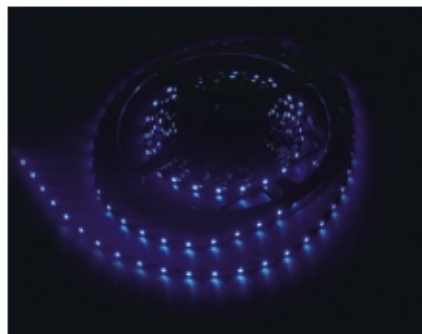


60LED3528軟光條
60LED 3528SMD flexible strip

產品型號 Part Number	顏色 Color	LED 數量 QTY	發光 角度 View Angle	工作 電壓 Work Voltage	功率 Power	波長/色溫 Wave/Length	光通量 Luminous Flux	尺寸 Size
ZYWW-F352808-60R	R	60	120°	12V	4.8W/m	620-630nm	60-70Lm	5000 x 8mm
ZYWW-F352808-60Y	Y	60	120°	12V	4.8W/m	585-595nm	70-80Lm	
ZYWW-F352808-60B	B	60	120°	12V	4.8W/m	460-470nm	50-60Lm	
ZYWW-F352808-60G	G	60	120°	12V	4.8W/m	515-525nm	110-120Lm	
ZYWW-F352808-60W	W	60	120°	12V	4.8W/m	2700-9000K	150-180Lm	
ZYWW-F352808-60RGB	RGB	60	120°	12V	4.8W/m	460-630nm	150-180Lm	



96LED3528軟光條
96LED 3528SMD flexible strip


產品型號 Part Number	LED 數量 QTY	LED 數量 QTY	發光 角度 View Angle	工作 電壓 Work Voltage	功率 Power	波長/色溫 Wave/Length	光通量 Luminous Flux	尺寸 Size
ZYWW-F352808-96R	R	96	120°	12V	7.7W/m	625-630nm	90-110Lm	5000 x 8mm
ZYWW-F352808-96Y	Y	96	120°	12V	7.7W/m	590-595nm	110-150Lm	
ZYWW-F352808-96B	B	96	120°	12V	7.7W/m	465-470nm	80-100Lm	
ZYWW-F352808-96G	G	96	120°	12V	7.7W/m	515-520nm	170-200Lm	
ZYWW-F352808-96W	W	96	120°	12V	7.7W/m	2700-9000K	240-300Lm	

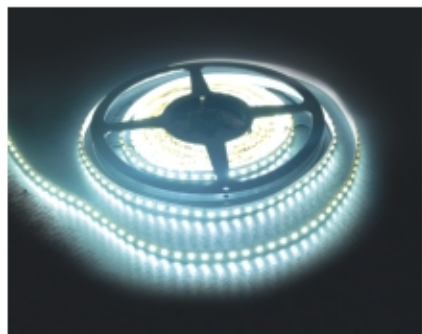


120LED3528軟光條
120LED 3528SMD flexible strip

產品型號 Part Number	顏色 Color	LED 數量 QTY	發光 角度 View Angle	工作 電壓 Work Voltage	功率 Power	波長/色溫 Wave/Length	光通量 Luminous Flux	尺寸 Size
ZYWW-F352810-120R	R	120	120°	12V	9.6W/m	625-630nm	120-140Lm	5000 x 10mm
ZYWW-F352810-120Y	Y	120	120°	12V	9.6W/m	590-595nm	140-160Lm	
ZYWW-F352810-120B	B	120	120°	12V	9.6W/m	465-470nm	100-120Lm	
ZYWW-F352810-120G	G	120	120°	12V	9.6W/m	515-520nm	220-240Lm	
ZYWW-F352810-120W	W	120	120°	12V	9.6W/m	2700-9000K	300-360Lm	

5050 軟光條 LED5050 flexible strip

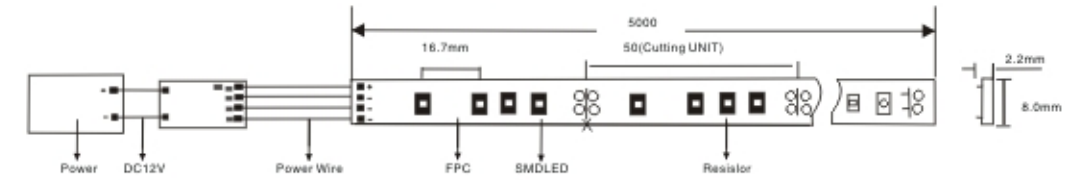


5050燈間距: 30燈33.3mm 48燈20.9mm 60燈16.7mm
5050 SMD Spacing: 30LED 33.3mm 48LED 20.9mm 60LED 16.7mm

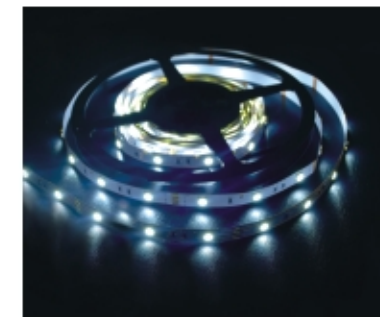


30LED5050軟光條
30LED 5050SMD flexible strip

產品型號 Part Number	顏色 Color	LED 數量 QTY	發光 角度 View Angle	工作 電壓 Work Voltage	功率 Power	波長/色溫 Wave/Length	光通量 Luminous Flux	尺寸 Size	顯色性 RI
ZYWW-F505008-30R	R	30	125°	12V	7.2W/m	625-630nm	90-100Lm	5000 x 810mm	
ZYWW-F505008-30Y	Y	30	125°	12V	7.2W/m	590-595nm	100-120Lm		
ZYWW-F505008-30B	B	30	125°	12V	7.2W/m	465-470nm	80-90Lm		
ZYWW-F505008-30G	G	30	125°	12V	7.2W/m	515-520nm	200-270Lm		
ZYWW-F505008-30W	W	30	125°	12V	7.2W/m	2700-9000K	200-270Lm		
ZYWW-F505010-30RGB	RGB	30	125°	12V	7.2W/m	465-630nm	240-270Lm	5000 x 10/12mm	

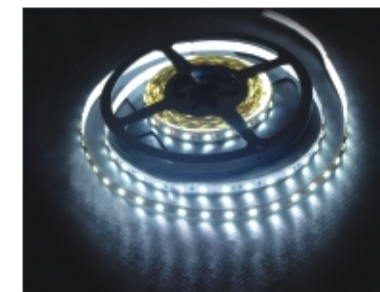

48LED5050軟光條
48LED 5050SMD flexible strip

產品型號 Part Number	顏色 Color	LED 數量 QTY	發光 角度 View Angle	工作 電壓 Work Voltage	功率 Power	波長/色溫 Wave/Length	光通量 Luminous Flux	尺寸 Size
ZYWW-F505012-48R	R	48	120°	12V	11.5W/m	625-630nm	120-140Lm	5000 x 12mm
ZYWW-F505012-30Y	Y	48	120°	12V	11.5W/m	590-595nm	130-150Lm	
ZYWW-F505012-30B	B	48	120°	12V	11.5W/m	465-470nm	100-130Lm	
ZYWW-F505012-30G	G	48	120°	12V	11.5W/m	515-520nm	360-400Lm	
ZYWW-F505012-30W	W	48	120°	12V	11.5W/m	2700-9000K	360-400Lm	
ZYWW-F505010-48RGB	RGB	48	120°	12V	10.15W/m	465-630nm	360-400Lm	5000 x 10/12mm

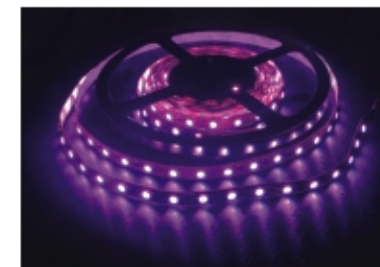

60LED5050軟光條
60LED 5050SMD flexible strip

產品型號 Part Number	顏色 Color	LED 數量 QTY	發光 角度 View Angle	工作 電壓 Work Voltage	功率 Power	波長/色溫 Wave/Length	光通量 Luminous Flux	尺寸 Size
ZYWW-F505010-30R	R	60	120°	12V	14.4W/m	625-630nm	180-270Lm	5000 x 10/12mm
ZYWW-F505010-30Y	Y	60	120°	12V	14.4W/m	590-595nm	200-300Lm	
ZYWW-F505010-30B	B	60	120°	12V	14.4W/m	465-470nm	120-180Lm	
ZYWW-F505010-30G	G	60	120°	12V	14.4W/m	515-520nm	420-540Lm	
ZYWW-F505010-30W	W	60	120°	12V	14.4W/m	2700-9000K	420-540Lm	
ZYWW-F505010-60RGB	RGB	60	120°	12V	14.4W/m	465-630nm	400-500Lm	5000 x 10/12mm
ZYWW-F505012-60RGB-IC	RGB	60	120°	12V	15W/m	465-630nm	400-500Lm	5000 x 12mm

防水類型: 滴膠防水 (IP65) 套管防水 (IP65) 半套管滴膠防水 (IP67) 全套管灌膠防水 (IP68)
Waterproof type: Epoxy Waterproofing(IP65) Waterproof Casing(IP65) Epoxy Waterproof half sleeves(IP67)
A full set of plastic pipe irrigation water(IP68)

軟燈條系列

Strip Light Series


特點:

- 1) 採用超高亮度貼片LED, 能耗低, 節能環保;
- 2) 光衰小, 使用壽命長;
- 3) 採用FRC柔性線路板, 可隨意彎曲;
- 4) 三個LED一回路, 可根據實際情況剪切;
- 5) 直流12V低壓供電更安全可靠;
- 6) 背貼優質3M雙面膠, 安裝簡單方便;
- 7) 可根據客戶要求做防水處理;
- 8) 每卷標準長度: 5m。

Features


- (1) Adopt ultra high bright SMD, to be energy-saving and environment friendly;
- (2) Low brightness declines and long life span;
- (3) High quality FRC board, easy to bend;
- (4) 3 LED-Loop, can be cut and spliced the actual situation;
- (5) Stable and safe with 12V DC power
- (6) Easy installation with dipsand adhesive tape;
- (7) To do water treatment according to customer requirements;
- (8) The standard length of each volume: 5m.

3528軟燈條 LED3528 flexible strip

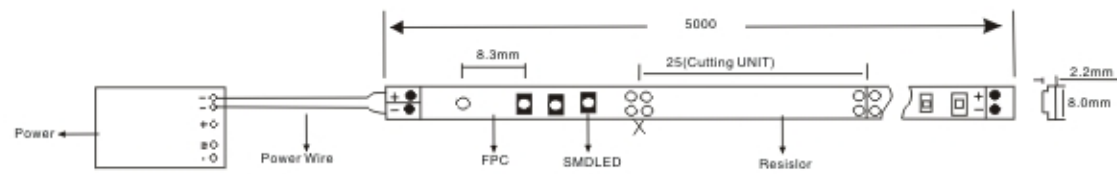


3528燈間距: 30燈33.3mm 48燈20.9mm 60燈16.7mm 96燈10.3mm 120燈8.3mm

3528 SMD Spacing: 30LED 33.3mm 48LED 20.9mm 60LED 16.7mm 96LED 10.3mm 120LED 8.3mm

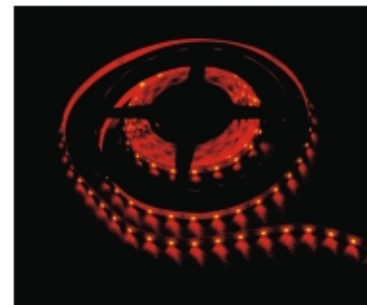

30LED3528軟光條

30LED 3528SMD flexible strip

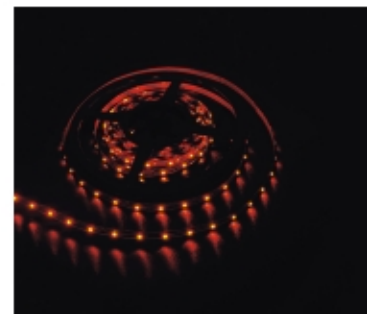

48LED3528軟光條

48LED 3528SMD flexible strip

防水類型: 滴膠防水 (IP65) 套管防水 (IP65) 半套管滴膠防水 (IP67) 全套管灌膠防水 (IP68)
 Waterproof type: Epoxy Waterproofing(IP65) Waterproof Casing(IP65) Epoxy Waterproof half sleeves(IP67)
 A full set of plastic pipe irrigation water(IP68)

產品型號 Part Number	顏色 Color	LED 數量 QTY	發光 角度 View Angle	工作 電壓 Work Voltage	功率 Power	波長/色溫 Wave/Length	光通量 Luminous Flux	尺寸 Size
ZYWW-F352808-30R	R	30	120°	12V	2.4W/m	620-630nm	30-40Lm	5000 x 8mm
ZYWW-F352808-30Y	Y	30	120°	12V	2.4W/m	585-595nm	30-40Lm	
ZYWW-F352808-30B	B	30	120°	12V	2.4W/m	460-470nm	25-35Lm	
ZYWW-F352808-30G	G	30	120°	12V	2.4W/m	515-525nm	60-90Lm	
ZYWW-F352808-30W	W	30	120°	12V	2.4W/m	2700-9000K	70-100Lm	

產品型號 Part Number	顏色 Color	LED 數量 QTY	發光 角度 View Angle	工作 電壓 Work Voltage	功率 Power	波長/色溫 Wave/Length	光通量 Luminous Flux	尺寸 Size
ZYWW-F352808-48R	R	48	120°	12V	3.8W/m	620-630nm	45-60Lm	5000 x 8mm
ZYWW-F352808-48Y	Y	48	120°	12V	3.8W/m	585-595nm	60-70Lm	
ZYWW-F352808-48B	B	48	120°	12V	3.8W/m	460-470nm	40-50Lm	
ZYWW-F352808-48G	G	48	120°	12V	3.8W/m	515-525nm	80-110Lm	
ZYWW-F352808-48W	W	48	120°	12V	3.8W/m	2700-9000K	120-145Lm	

硬燈條系列


Hard lamp series

產品特點:

- 1) 採用超高亮度貼片LED, 能耗低, 節能環保;
- 2) 光衰小, 使用壽命長;
- 3) 採用FR4線路板堅硬平直, 不易變形; 優質鋁基板散熱性更好;
- 4) 三個LED一回路, 可根據實際情況進行剪切及拼接;
- 5) 直流12V低壓供電更安全可靠;
- 6) 需要時可做防水處理。

Features

- (1) Using ultra-high brightness SMD LED, low energy consumption, energy saving;
- (2) light small decline, long life;
- (3) FR4 circuit board with a hard flat, not easily deformed. High-quality aluminum board and better heat dissipation;
- (4) 3 LED-Loop, can be cut and spliced the actual situation;
- (5) DC 12 low voltage power supply more secure;
- (6) Necessary, do waterproof.

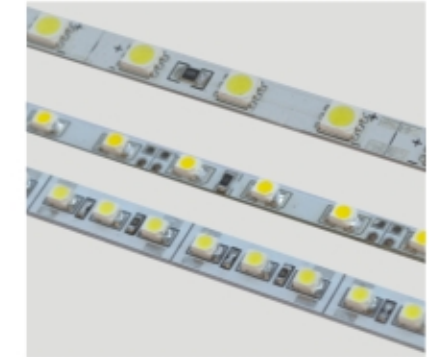

3528硬燈條
SMD 3528 RIGID LIGHT



5050硬燈條
SMD 5050 RIGID LIGHT

3528硬燈條 SMD 3528 RIGID LIGHT								
產品型號 Part Number	顏色 Color	LED 數量 QTY	發光角度 View Angle	工作電壓 Work Voltage	功率 Power	波長/色溫 Wave/Length	板材 Plank Stuff	尺寸 Size
ZYWW-P30005-30W-35	W	30	120°	12V	2.4W	2700-10000K	FR4	300 x 5mm
ZYWW-A50008-63W-35	W	63	120°	12V	5W	2700-10000K	AL	500 x 8mm
ZYWW-A54006-36W-35	W	36	120°	12V	2.9W	2700-10000K	AL	540 x 6mm
ZYWW-A65008-42W-35	W	42	120°	12V	3.3W	2700-10000K	AL	650 x 8mm
5050硬燈條 SMD 5050 RIGID LIGHT								
ZYWW-A30008-18W-50	W	18	120°	12V	4.3W	2700-10000K	FR4	300 x 8mm
ZYWW-A45008-30W-50	W	30	120°	12V	7.2W	2700-10000K	AL	450 x 8mm
ZYWW-A45008-36W-50	W	36	120°	12V	8.6W	2700-10000K	AL	450 x 8mm
ZYWW-A49512-30W-50	W	30	120°	12V	7.2W	2700-10000K	AL	495 x 12mm
ZYWW-A40010-15RGB-50	RGB	15	120°	12V	3.6W	2700-10000K	AL	400 x 10mm

說明:


- (1) 以上型號為我司白光燈條, 可根據客戶要求做其它顏色。
- (2) 可根據客戶要求尺寸訂制: 3528系列單塊板寬不小於4.5mm, 板長不大於600mm; 5050系列單塊板寬不小於8mm, 板長不大於600mm;
- (3) 光條拼接長度不大於5M;

Explain:

- (1) Our model above white light bar, can make other colors according to customers requirements;
- (2) On the board according to customers requirements for customized; 3528 series single-block width of not less than 4.5mm, Board grow up to 600mm; 5050 series single-block width of not less than 8mm; Board grow up to 600mm;
- (3) Article optical splicing, the length of not more than 5M;

硬燈條系列

Hard lamp series

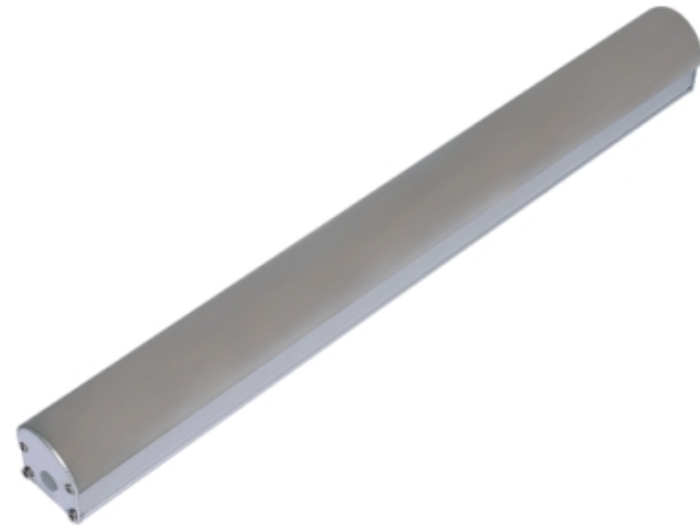

型號model: ZYWW-YDT001
 光源light source: LED
 輸入電流input current: 12V
 功率power: 14W
 可調色溫adjustable color temperature: 2400K-6500K
 光通量flux: 1120LM
 光束角beam angle: 125°
 外觀尺寸exterior size: 1000 x 20 x 15mm



型號model: ZYWW-YDT002
 光源light source: LED
 輸入電流input current: 12V
 功率power: 14W
 可調色溫adjustable color temperature: 2700K-6500K
 光通量flux: 1120LM
 光束角beam angle: 125°
 外觀尺寸exterior size: 1000 x 20 x 15mm



型號model: ZYWW-YDT003
 光源light source: LED
 輸入電流input current: 12V
 功率power: 14W
 可調色溫adjustable color temperature: 2700K-6500K
 光通量flux: 1120LM
 光束角beam angle: 125°
 外觀尺寸exterior size: 1000 x 18 x 13mm



型號model: ZYWW-YDT004
 光源light source: LED
 輸入電流input current: 12V
 功率power: 14W
 可調色溫adjustable color temperature: 2400K-6500K
 光通量flux: 1120LM
 光束角beam angle: 125°
 外觀尺寸exterior size: 1000 x 20 x 20mm

產品型號 Part Number	顏色 Color	LED數量 QTY	發光角度 View Angle	工作電壓 Work Voltage	功率 Power	波長/色溫 Wave/Length	光通量 Luminous Flux	尺寸 Size
ZYWW-F5050-60R	R	60	120°	12V	14.5W	620-630nm	60-70Lm	1米 (1米內可定)
ZYWW-F5050-60Y	Y	60	120°	12V	14.5W	585-595nm	70-80Lm	
ZYWW-F5050-60B	B	60	120°	12V	14.5W	460-470nm	50-60Lm	
ZYWW-F5050-60G	G	60	120°	12V	14.5W	515-525nm	110-120Lm	
ZYWW-F5050-60W	W	60	120°	12V	14.5W	2400-9000K	150-180Lm	
ZYWW-F5050-120W	W	120	120°	12V	29W	2400-9000K	300-360Lm	

說明:

- (1) 以上為我司白燈LED光條，可根據客戶要求訂做長度和顏色。
- (2) 可根據客戶要求尺寸進行訂制：單塊板寬不小於4.5mm,板長不大於1000mm;
- (3) 光條拼接時，長度不大於5M。

Explain:

- (1) More than Division I, a white light LED light bar, customized length and color according to customer requirements;
- (2) On the board according to customer requirements for customized;single-block width of not less than 4.5mm, Board grow up to 1000mm;
- (3) Article optical splicing,the length of not more than 5M;

產品特點:


- (1) 採用超高亮度直插LED，能耗低，節能環保;
- (2) 光衰小，使用壽命長;
- (3) 採用高品質FR4線路板堅硬平直，不易變形;
- (4) 三個LED一回路，可根據實際情況進行剪切或拼接;
- (5) 直流12V低壓供電更安全可靠;
- (6) 需要時可做防水處理。
- (7) 可調色溫小燈槽4-5種;
- (8) 可調色溫畫燈;
- (9) 可調色溫鏡前燈。

Features


- (1) Using ultra-high brightness-dip LED,low energy consumption,energy Saving;
- (2) light small decline,long life;
- (3) FR4 circuit board with a hard flat,not easily deformed;
- (4) 3 LED-Loop,can be cut and spliced the actual situation;
- (5) DC 12 low voltage power supply more secure;
- (6) Necessary, do waterproof;
- (7)Adjustable color temperature of 4-5 species of small light tank;
- (8)Adjustable color temperature light painting;
- (9)Adjustable color temperature Mirror Light

LED控制器

LED controuer series

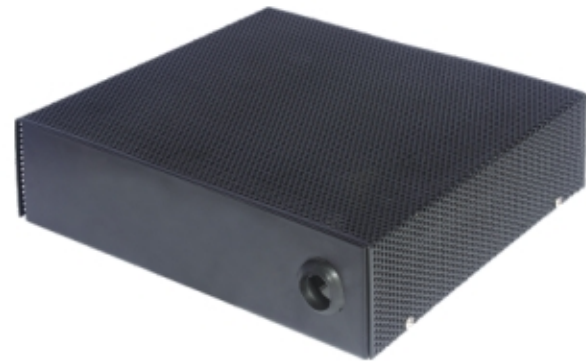

可适用于飞利浦0-10V调光开关
或0-10V模拟信号进行调光

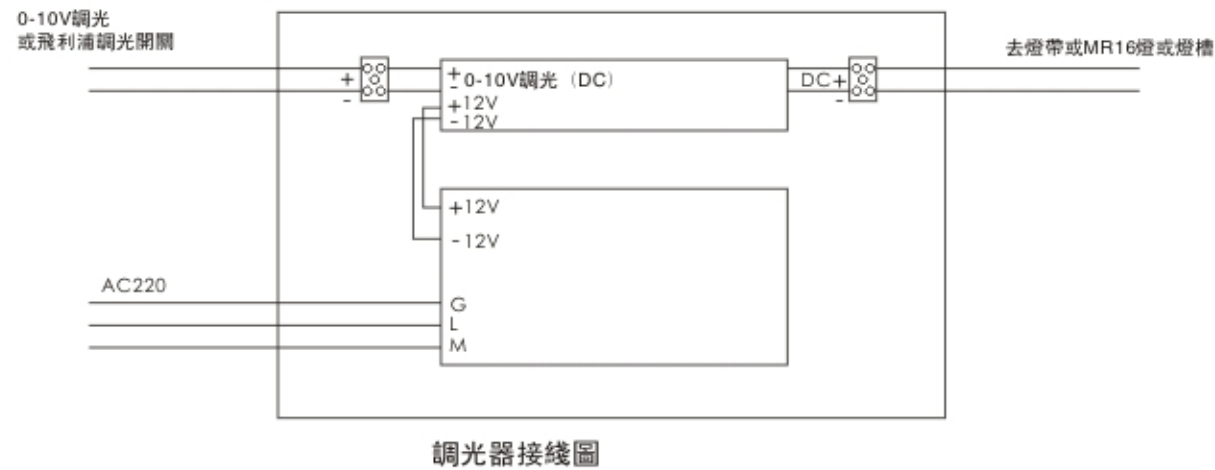

技術參數

1. 供电电压: AC220V
2. 输出电压: 12V或24V
3. 外型尺寸: 200×240×60mm
4. 净重: 2.3KG
5. 输出功率: 最大300W
6. 最长可拖5050/20米, 3528/40米

Technical parameters

- A power supply voltage: AC220V
- (2) Output voltage: 12V or 24V
 - (3) Dimensions: 200 × 240 × 60mm
 - (4) Net weight: 2.3KG
 - (5) Output power: 300W
- A maximum drag of 5050/20 m, 3528/40 m

LED线条灯系列

LED Linear Light Series



型号model: ZYWW-XTD001
光源light source: LED
输入电流input current: 12V
功率power: 14W
可调色温adjustable color temperature: 2700K/3000K/4000K/6500K
光通量flux: 1120LM
光束角beam angle: 125°
外观尺寸exterior size: 1000 × 18 × 14mm



型号model: ZYWW-XTD002
光源light source: LED
输入电流input current: 12V
功率power: 14W
可调色温adjustable color temperature: 2700K/3000K/4000K/6500K
光通量flux: 1120LM
光束角beam angle: 125°
外观尺寸exterior size: 1000 × 27 × 19mm




型号model: ZYWW-XTD003
光源light source: LED
输入电流input current: 12V
功率power: 14W
可调色温adjustable color temperature: 2700K/3000K/4000K/6500K
光通量flux: 1120LM
光束角beam angle: 125°
外观尺寸exterior size: 1000 × 17 × 12mm

LED筒燈系列

LED Downlight Series




型號model: ZYWW-DD001
光源light source: LED
輸入電流input current: 300mA
功率power: 5W
可調色溫adjustable color temperature: 2700K/3000K/4200K/6400K
光通量flux: 400LM
光束角beam angle: 85°
外觀尺寸exterior size: $\varnothing 77 \times 81$ mm
開孔尺寸hole size: $\varnothing 65$ mm

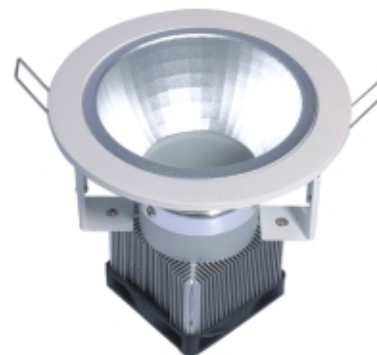

型號model: ZYWW-DD004
光源light source: LED
輸入電流input current: 300mA
功率power: 20W
可調色溫adjustable color temperature: 2700K/3000K/4200K/6400K
光通量flux: 1600LM
光束角beam angle: 85°
外觀尺寸exterior size: $\varnothing 146 \times 137$ mm
開孔尺寸hole size: $\varnothing 130$ mm



型號model: ZYWW-DD002
光源light source: LED
輸入電流input current: 300mA
功率power: 10W
可調色溫adjustable color temperature: 2700K/3000K/4200K/6400K
光通量flux: 800LM
光束角beam angle: 85°
外觀尺寸exterior size: $\varnothing 100 \times 90$ mm
開孔尺寸hole size: $\varnothing 84$ mm

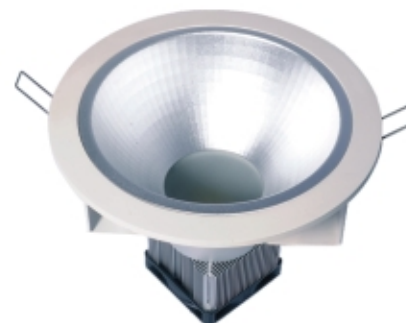

型號model: ZYWW-DD005
光源light source: LED
輸入電流input current: 300mA
功率power: 30W
可調色溫adjustable color temperature: 2700K/3000K/4200K/6400K
光通量flux: 2400LM
光束角beam angle: 85°
外觀尺寸exterior size: $\varnothing 146 \times 137$ mm
開孔尺寸hole size: $\varnothing 130$ mm



型號model: ZYWW-DD003
光源light source: LED
輸入電流input current: 300mA
功率power: 15W
可調色溫adjustable color temperature: 2700K/3000K/4200K/6400K
光通量flux: 1200LM
光束角beam angle: 85°
外觀尺寸exterior size: $\varnothing 128 \times 103$ mm
開孔尺寸hole size: $\varnothing 118$ mm



型號model: ZYWW-DD006
光源light source: LED
輸入電流input current: 300mA
功率power: 40W
可調色溫adjustable color temperature: 2700K/3000K/4200K/6400K
光通量flux: 3200LM
光束角beam angle: 85°
外觀尺寸exterior size: $\varnothing 228 \times 165$ mm
開孔尺寸hole size: $\varnothing 216$ mm

LED筒燈系列

LED Downlight Series



型號model: ZYWW-DD007
光源light source: LED
輸入電流input current: 300mA
功率power: 1-3W
可調色溫adjustable color temperature: 2700K-6000K
光通量flux: 80LM/W
光束角beam angle: 8° /35° /45° /60°
外觀尺寸exterior size: Ø82 x 21mm
開孔尺寸hole size: Ø45mm



型號model: ZYWW-DD010
光源light source: LED
輸入電流input current: 300mA
功率power: 10W
可調色溫adjustable color temperature: 3000K
光通量flux: 800LM
光束角beam angle: 36°
外觀尺寸exterior size: Ø109 x 110mm
開孔尺寸hole size: Ø95mm



型號model: ZYWW-DD008
光源light source: LED
輸入電流input current: 300mA
功率power: 3W
可調色溫adjustable color temperature: 2700K-6000K
光通量flux: 240LM
光束角beam angle: 8° /35° /45° /60°
外觀尺寸exterior size: Ø86 x 42mm
開孔尺寸hole size: Ø70mm



型號model: ZYWW-DD011
光源light source: LED
輸入電流input current: 300mA
功率power: 22W
可調色溫adjustable color temperature: 3000K
光通量flux: 1760LM
光束角beam angle: 40°
外觀尺寸exterior size: Ø135 x 125mm
開孔尺寸hole size: Ø125mm



型號model: ZYWW-DD009
光源light source: LED-COB
輸入電流input current: 300mA
功率power: 15W
可調色溫adjustable color temperature: 2700K/3000K/4200K/6400K
光通量flux: 1200LM
光束角beam angle: 35°
外觀尺寸exterior size: Ø129 x 81mm
開孔尺寸hole size: Ø112mm



型號model: ZYWW-DD012
光源light source: LED
輸入電流input current: 300mA
功率power: 33W
可調色溫adjustable color temperature: 3000K
光通量flux: 2640LM
光束角beam angle: 24°
外觀尺寸exterior size: Ø170 x 170mm
開孔尺寸hole size: Ø165mm

LED筒燈系列

LED Downlight Series



型號model: ZYWW-DD013
光源light source: LED
輸入電流input current: 300mA
功率power: 5W
可調色溫adjustable color temperature: 2700K/3000K/4200K/6400K
光通量flux: 400LM
光束角beam angle: 35°
外觀尺寸exterior size: Ø75 × 80mm
開孔尺寸hole size: Ø65mm



型號model: ZYWW-DD014
光源light source: LED
輸入電流input current: 300mA
功率power: 7W
可調色溫adjustable color temperature: 2700K/3000K/4200K/6400K
光通量flux: 560LM
光束角beam angle: 35°
外觀尺寸exterior size: Ø85 × 76mm
開孔尺寸hole size: Ø70mm



型號model: ZYWW-DD015
光源light source: LED-COB
輸入電流input current: 300mA
功率power: 9W
可調色溫adjustable color temperature: 2700K/3000K/4200K/6400K
光通量flux: 720LM
光束角beam angle: 35°
外觀尺寸exterior size: Ø135 × 81mm
開孔尺寸hole size: Ø115mm



型號model: ZYWW-DD016
光源light source: LED-COB
輸入電流input current: 300mA
功率power: 12W
可調色溫adjustable color temperature: 2700K/3000K/4200K/6400K
光通量flux: 960LM
光束角beam angle: 35°
外觀尺寸exterior size: Ø105 × 77mm
開孔尺寸hole size: Ø92mm

LED明裝筒燈系列

LED Down Light Series



型號model: ZYWW-DD017
光源light source: LED - COB
輸入電流input current: 300mA
功率power: 3W
可調色溫adjustable color temperature: 2700K/3000K/4000K/6500K
光通量flux: 240LM
光束角beam angle: 35°
外觀尺寸exterior size: Ø63 × 82mm
開孔尺寸hole size: Ø32mm



型號model: ZYWW-DD018
光源light source: LED - COB
輸入電流input current: 300mA
功率power: 6W
可調色溫adjustable color temperature: 2700K/3000K/4000K/6500K
光通量flux: 480LM
光束角beam angle: 35°
外觀尺寸exterior size: Ø83 × 112mm
開孔尺寸hole size: Ø52mm



型號model: ZYWW-DD019
光源light source: LED - COB
輸入電流input current: 300mA
功率power: 12W
可調色溫adjustable color temperature: 2700K/3000K/4000K/6500K
光通量flux: 960LM
光束角beam angle: 35°
外觀尺寸exterior size: Ø102 × 110mm
開孔尺寸hole size: Ø66mm



型號model: ZYWW-DD020
光源light source: LED - COB
輸入電流input current: 300mA
功率power: 18W
可調色溫adjustable color temperature: 2700K/3000K/4000K/6500K
光通量flux: 1440LM
光束角beam angle: 35°
外觀尺寸exterior size: Ø123 × 133mm
開孔尺寸hole size: Ø93mm

LED筒燈系列

LED Downlight Series



型號model: ZYWW-DD021
 光源light source: LED ~ COB
 輸入電流input current: 300mA
 功率power: 9W
 可調色溫adjustable color temperature: 2700K/3000K/4000K/6500K
 光通量flux: 720LM
 光束角beam angle: 35°
 外觀尺寸exterior size: 125 x 125 x 85mm
 開孔尺寸hole size: 106 x 106mm



型號model: ZYWW-DD025
 光源light source: LED
 輸入電流input current: 300mA
 功率power: 10/20/30W
 可調色溫adjustable color temperature: 2700K、3000K、4200K、6400K
 光通量flux: 80LM/W
 光束角beam angle: 85°
 外觀尺寸exterior size: 156 x 156 x 123mm
 179 x 179 x 155mm
 185 x 185 x 170mm
 開孔尺寸hole size: 142 x 142mm
 165 x 165mm
 172 x 172mm



型號model: ZYWW-DD022
 光源light source: LED ~ COB
 輸入電流input current: 300mA
 功率power: 2 x 9W
 可調色溫adjustable color temperature: 2700K/3000K/4000K/6500K
 光通量flux: 1400LM
 光束角beam angle: 35°
 外觀尺寸exterior size: 235 x 126 x 83mm
 開孔尺寸hole size: 211 x 107mm



型號model: ZYWW-DD026
 光源light source: LED
 輸入電流input current: 300mA
 功率power: 2 x 10/20/30W
 可調色溫adjustable color temperature: 2700K、3000K、4200K、6400K
 光通量flux: 80LM/W
 光束角beam angle: 85°
 外觀尺寸exterior size: 278 x 156 x 123mm
 323 x 179 x 155mm
 338 x 185 x 185mm
 開孔尺寸hole size: 142 x 261mm
 165 x 307mm
 172 x 323mm



型號model: ZYWW-DD023
 光源light source: LED
 輸入電流input current: 300mA
 功率power: 1-10W
 可調色溫adjustable color temperature: 2700K-6000K
 光通量flux: 80LM/W
 光束角beam angle: 8° /35° /45° /60°
 外觀尺寸exterior size: 156 x 156 x 86mm
 開孔尺寸hole size: 134 x 134mm



型號model: ZYWW-DD027
 光源light source: LED
 輸入電流input current: 300mA
 功率power: 10/20/30W
 可調色溫adjustable color temperature: 2700K、3000K、4200K、6400K
 光通量flux: 80LM/W
 光束角beam angle: 85°
 外觀尺寸exterior size: 134 x 134 x 123mm
 155 x 155 x 155mm
 179 x 164 x 170mm
 開孔尺寸hole size: 135 x 135mm
 156 x 156mm
 165 x 180mm




型號model: ZYWW-DD024
 光源light source: LED
 輸入電流input current: 300mA
 功率power: 1-10W
 可調色溫adjustable color temperature: 2700K-6000K
 光通量flux: 80LM/W
 光束角beam angle: 8° /35° /45° /60°
 外觀尺寸exterior size: 280 x 156 x 86mm
 開孔尺寸hole size: 134 x 256mm




型號model: ZYWW-DD028
 光源light source: LED
 輸入電流input current: 300mA
 功率power: 2 x 10/20/30W
 可調色溫adjustable color temperature: 2700K、3000K、4200K、6400K
 光通量flux: 80LM/W
 光束角beam angle: 85°
 外觀尺寸exterior size: 273 x 134 x 123mm
 310 x 155 x 155mm
 331 x 160 x 170mm
 開孔尺寸hole size: 135 x 274mm
 156 x 311mm
 165 x 332mm

LED洗牆燈系列


LED Wall Washer Series

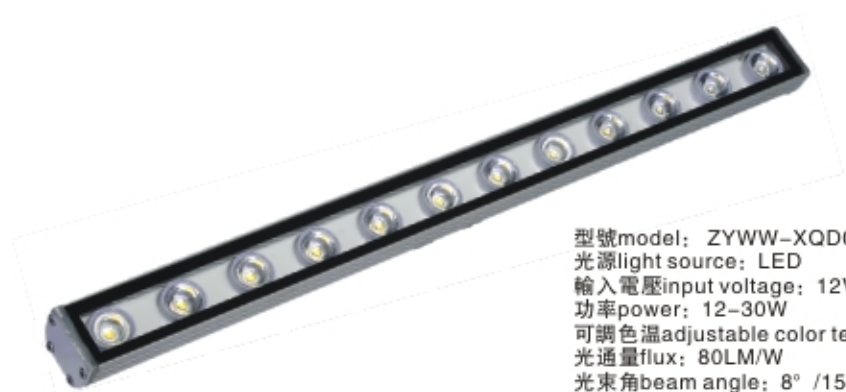

型號model: ZYWW-XQD001
 光源light source: LED
 輸入電壓input voltage: 12V
 功率power: 12-30W
 可調色溫adjustable color temperature: 2700K/3000K/4000K/6000K
 光通量flux: 80LM/W
 光束角beam angle: 8° /15° /30° /45° /60° /120°
 外觀尺寸exterior size: 1000 × 28 × 36mm

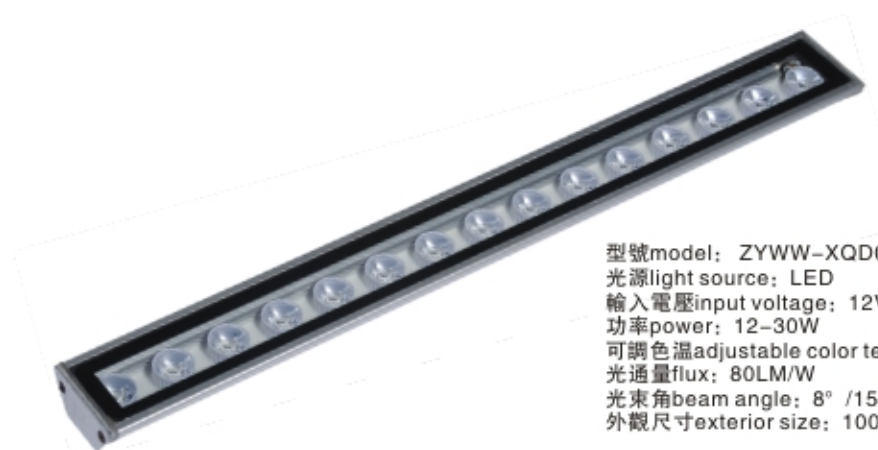

型號model: ZYWW-XQD002
 光源light source: LED
 輸入電壓input voltage: 12V
 功率power: 12-30W
 可調色溫adjustable color temperature: 2700K/3000K/4000K/6000K
 光通量flux: 80LM/W
 光束角beam angle: 8° /15° /30° /45° /60° /120°
 外觀尺寸exterior size: 1000 × 55 × 25mm

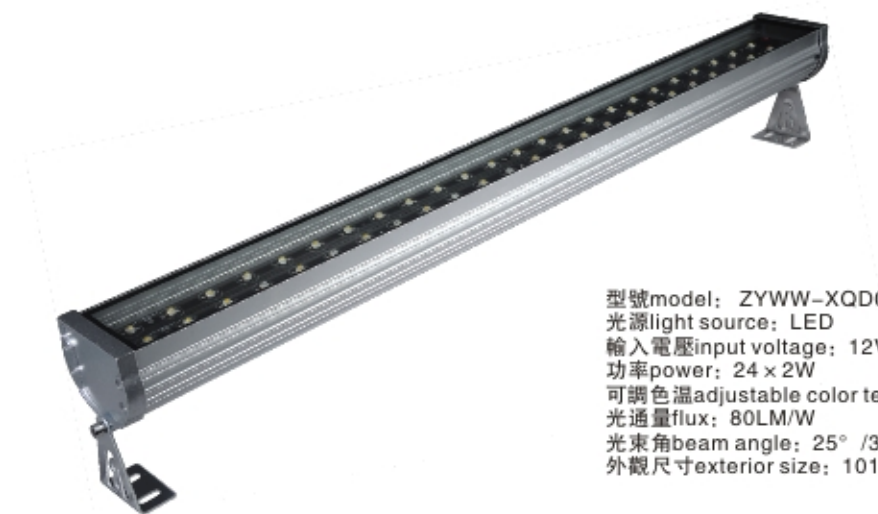

型號model: ZYWW-XQD003
 光源light source: LED
 輸入電壓input voltage: 12V
 功率power: 24 × 2W
 可調色溫adjustable color temperature: 2700K/3000K
 光通量flux: 80LM/W
 光束角beam angle: 25° /30° /45° /60° /120°
 外觀尺寸exterior size: 1012 × 104 × 96mm

LED埋地燈系列

LED underground lamp series




型號model: ZYWW-MDD001
 光源light source: LED
 輸入電壓input voltage: 12V
 功率power: 1W
 可調色溫adjustable color temperature: 2700K-6000K
 光通量flux: 80LM
 光束角beam angle: 25° /30° /45° /60° /120°
 外觀尺寸exterior size: Ø43 × Ø75 × 48mm



型號model: ZYWW-MDD002
 光源light source: LED
 輸入電壓input voltage: 12V
 功率power: 1 × 1W
 可調色溫adjustable color temperature: 2700K-6500K
 光通量flux: 80LM
 光束角beam angle: 25° /30° /45° /60° /120°
 外觀尺寸exterior size: Ø41 × 70mm
 開孔尺寸hole size: Ø38mm



型號model: ZYWW-MDD003
 光源light source: LED
 輸入電壓input voltage: 12V
 功率power: 1 × 3W
 可調色溫adjustable color temperature: 2700K-6500K
 光通量flux: 240LM
 光束角beam angle: 25° /30° /45° /60° /120°
 外觀尺寸exterior size: 40 × 40 × 52mm
 開孔尺寸hole size: Ø38mm



型號model: ZYWW-MDD004
 光源light source: LED
 輸入電壓input voltage: 12V
 功率power: 5 × 1W
 可調色溫adjustable color temperature: 2700K、3000K、4000K、6500K
 光通量flux: 400LM
 光束角beam angle: 25° /30° /45° /60° /120°
 外觀尺寸exterior size: Ø105 × 53mm
 開孔尺寸hole size: Ø95mm

LED埋地燈系列

LED underground lamp series



型號model: ZYWW-MDD005
光源light source: LED
輸入電壓input voltage: 12V
功率power: 1W
可調色溫adjustable color temperature: 2700K-6000K
光通量flux: 80LM
光束角beam angle: 25° /30° /45° /60° /120°
外觀尺寸exterior size: Ø40 × 52mm



型號model: ZYWW-MDD006
光源light source: LED
輸入電壓input voltage: 12V
功率power: 3W
可調色溫adjustable color temperature: 2700K-6000K
光通量flux: 240LM
光束角beam angle: 25° /30° /45° /60° /120°
外觀尺寸exterior size: Ø97 × 113mm



型號model: ZYWW-MDD007
光源light source: LED
輸入電壓input voltage: 12V
功率power: 3W
可調色溫adjustable color temperature: 2700K-6000K
光通量flux: 240LM
光束角beam angle: 25° /30° /45° /60° /120°
外觀尺寸exterior size: Ø102 × 48mm




型號model: ZYWW-MDD008
光源light source: LED
輸入電壓input voltage: 12V
功率power: 7W
可調色溫adjustable color temperature: 2700K-6000K
光通量flux: 560LM
光束角beam angle: 25° /30° /45° /60° /120°
外觀尺寸exterior size: Ø180 × 57mm

LED牆角燈系列

LED wall lamp




型號model: ZYWW-QJD001
光源light source: LED
輸入電流input current: 300mA
功率power: 1W
可調色溫adjustable color temperature: 2700K/3000K/4000K/6500K
光通量flux: 80LM
光束角beam angle: 120°
外觀尺寸exterior size: 83 × 83 × 31mm
開孔尺寸hole size: 75 × 65mm

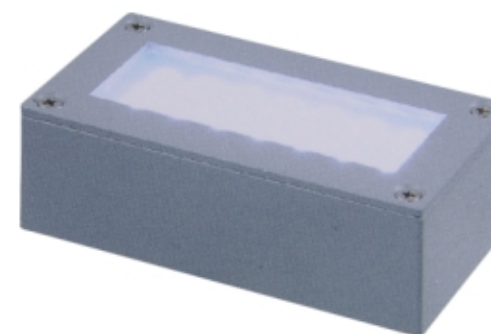

型號model: ZYWW-QJD002
光源light source: LED
輸入電流input current: 300mA
功率power: 2-4W
可調色溫adjustable color temperature: 2700K-6000K
光通量flux: 80LM/W
光束角beam angle: 120°
外觀尺寸exterior size: 127 × 67 × 40mm

LED牆角燈系列


LED wall lamp



型號model: ZYWW-QJD003
光源light source: LED
輸入電流input current: 300mA
功率power: 3-5W
可調色溫adjustable color temperature: 2700K-6000K
光通量flux: 80LM/W
光束角beam angle: 120°
外觀尺寸exterior size: 110 x 110 x 97mm




型號model: ZYWW-QJD006
光源light source: LED
輸入電流input current: 300mA
功率power: 3W
可調色溫adjustable color temperature: 2700K-6000K
光通量flux: 240LM
光束角beam angle: 120°
外觀尺寸exterior size: 90 x 90 x 51mm

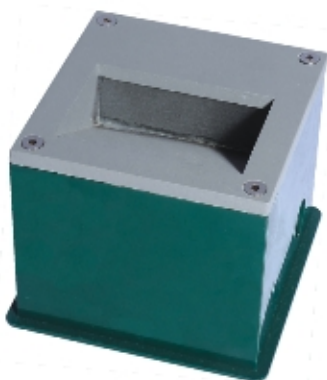


型號model: ZYWW-QJD004
光源light source: LED
輸入電流input current: 300mA
功率power: 3-5W
可調色溫adjustable color temperature: 2700K-6000K
光通量flux: 80LM/W
光束角beam angle: 120°
外觀尺寸exterior size: 165 x 100 x 65mm



型號model: ZYWW-QJD007
光源light source: LED
輸入電流input current: 300mA
功率power: 3-5W
可調色溫adjustable color temperature: 2700K-6000K
光通量flux: 80LM/W
光束角beam angle: 120°
外觀尺寸exterior size: 125 x 225 x 80mm

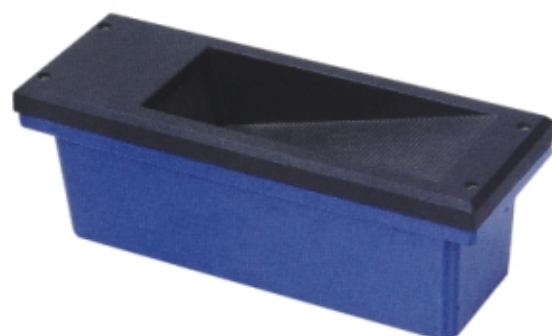

型號model: ZYWW-QJD005
光源light source: LED
輸入電流input current: 300mA
功率power: 3W
可調色溫adjustable color temperature: 2700K-6000K
光通量flux: 240LM
光束角beam angle: 120°
外觀尺寸exterior size: 315 x 110 x 115mm

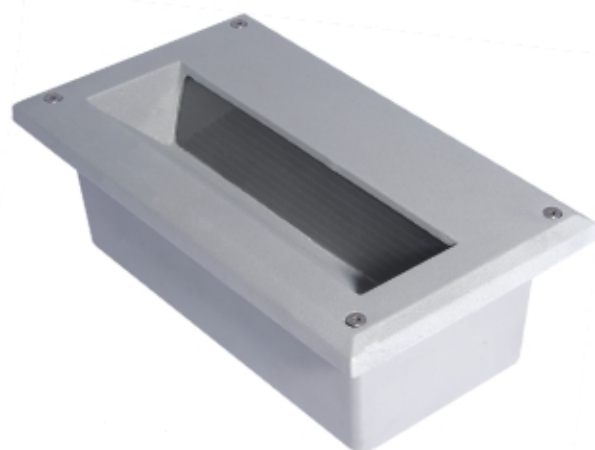

型號model: ZYWW-QJD008
光源light source: LED
輸入電流input current: 300mA
功率power: 3-6W
可調色溫adjustable color temperature: 2700K-6000K
光通量flux: 80LM/W
光束角beam angle: 120°
外觀尺寸exterior size: 70 x 253 x 95mm